

Propeller water meters

MWN HORIZONTAL ROTOR AXIS PROPELLER WATER METER (WOLTMAN) DN40 TO DN300

DESCRIPTION

The MWN Nubis is a horizontal rotor axis propeller dry water meter of the Woltman design. The propeller axis is parallel to the piping centreline once installed. The Nubis water meters feature state-of-the-art design and processing solutions which provide a long operating life with resistance to strong external electromagnetic fields. The water meter is compatible with clip-on communication modules for automatic wired or wireless meter reading. The water meter has been designed and manufactured to the MID (Measuring Instruments Directive) and in compliance with EN14154, ISO4064 and OIML R49 for the maximum measurement range of R200.



APPLICATION

The water meters are intended for metering in industrial supply systems of cold water operating at temperatures up to 50°C and hot water operating at temperatures up to 130°C at low pressure losses with relatively constant and high flow rates. The maximum admissible pressure (MAP) is 16 bar. The water meter design enables installation in horizontal piping with the counter upward (H) or sideways (H), in vertical piping (V), and in piping oriented between H and V. The rotary counter provides indications that are easily readable directly from the front face in different installation orientations. The water meters designed to IP68 are excellent for operation in difficult ambient conditions, and the standard version is compatible with universal induction communication modules which feature #UTIP (Universal TI Plug). The IP65 water meters are compatible with optical and induction communication modules.

The data transmission system is immune to interference from external electromagnetic fields; the EM field immunity is provided by induction detection of counter readings

Measurement characteristics adjustable without the drain duct

The construction materials and the double-sided bearing of the hydrodynamically balanced rotor ensure stable metrological performance and reliable operation in the verification intervals

The precision workmanship and the modular design of the measuring insert provide high measurement ranges


Robust counter safety cover for protection against external impacts occurring in the water meter's working environment


#UTIP interface for universal induction communication modules with induction readout detection capability

Easy reading of the water meter's identification data on the counter guard, even with a communication module installed

The IP68-rated counter mechanism is 358° swivel-set

Cast-iron cover with extended counter guard to ensure high resistance to external EM fields

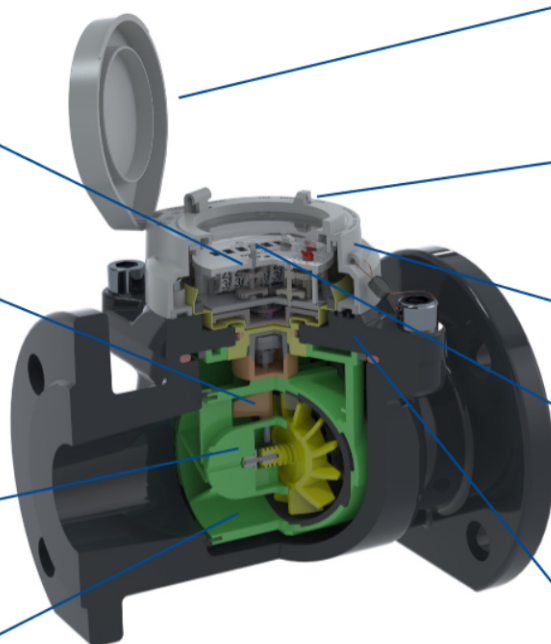

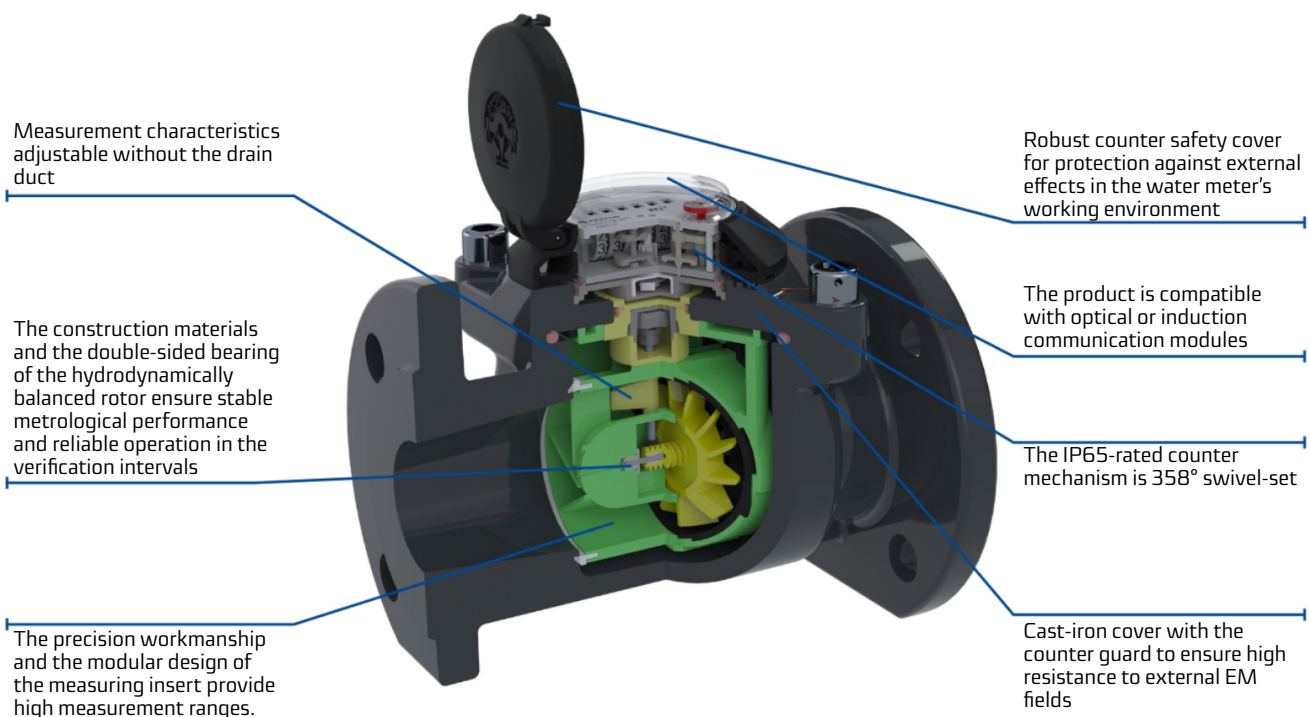

ADVANTAGES

- Excellent metrological parameters
- Remote meter reading via wired or wireless interfaces
- Low overall water meter weight
- Interchangeable, unified design of the measuring insert: compatible with several body sizes for optimum water meter installation management
- Any installation orientation is feasible without affecting the metrological parameters, allowing a more liberal design of new and existing water meter connections
- High anti-corrosive and damage resistance performance of the paint coat (made by epoxy powder coating)
- The standard water meter version is AMR (MDMS)-capable (automatic meter reading), while the IP68 version is provided with #UTIP for compatibility with universal induction communication modules
- Easy reading of indications and parameters by:
 - Any orientation of the counter mechanism within 0 to 358°
 - Hermetically sealed, non-fogging counter in the IP68 version
 - Location of the water meter parameter legend on the top surface of the counter cover in the IP68 version
- Remote wireless indication reading with a portable terminal or a stationary reading system
- Wireless-system-based indication reading with:
 - Induction communication modules (TI): IN-WMBUS, IN-GSM for IP68 and IP65
 - Optical communication modules (IR): APT-O3A-4 for IP65
- Wired-system-based indication reading with:
 - Induction communication modules (TI): IN-PULSE for IP68 and IP65
 - Optical communication modules (IR): APT-MBUS-NA-4 and AT-MBUS-NE-01 for IP65
 - NK reed relay pulse transmitter for IP65
- Alarm output capability: the meter with a universal induction communication module is capable of remote indication of any removal of or damage to the module, disruption of operation, reverse flows, leakages, external EM fields, and more
- Tested and robust design
- Long operating life

KEY FEATURES

- IP68 rated: capable of operation in extremely difficult ambient conditions (including full immersion in water) alone or with a communication module installed
- IP68 rated: highly esthetic droplet-shaped design for the counter safety cover and guard
- EN 14154-3 compliant resistance to external magnetic fields
- High performance and reliability with stable metrological parameters in the entire service life
- Low starting flow
- Wide metering range
- Electronic diagnostics of metrological parameters
- Modular design
- Removable measuring insert
- Magnetic coupling

REGULATORY AND STANDARDS COMPLIANCE

- Directive 2014/32/EC of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of measuring instruments
- Polish Act of 13/04/2016 on market surveillance and compliance assessment systems
- OIML R 49-1:2006 - Water meters intended for the metering of cold potable water and hot water. Part 1: Metrological and technical requirements
- OIML R 49-2:2004 - Water meters intended for the metering of cold potable water and hot water. Part 2: Test methods
- OIML R 49-2:2013 - Water meters intended for the metering of cold potable water and hot water. Part 2: Test methods
- OIML R 49-3:2013 - Water meters intended for the metering of cold potable water and hot water. Part 3: Test report format
- EN 14154-1:2005+A2:2011 - Water meters. Part 1: General requirements
- EN 14154-2:2005+A2:2011 - Water meters. Part 2: Installation and conditions of use
- EN 14154-3:2005+A2:2011 - Water meters. Part 3: Test methods and equipment
- EN ISO 4064-1:2017 - Water meters for cold potable water and hot water. Part 1: Metrological and technical requirements
- EN ISO 4064-2:2017 - Water meters for cold potable water and hot water. Part 2: Test methods
- EN ISO 4064-5:2017 - Water meters for cold potable water and hot water. Part 5: Installation requirements
- EU type test certificate - Cold water, no SK08-MI001-SMU002
- PZH Nation Institute of Hygiene and WRAS certificate (all materials used in MWN water meters have Hygiene Certificates for use with potable water)
- Classification of environmental climate and mechanical conditions: Class B (ref. EN-ISO 4064-1:2014 E)
- Classification of mechanical environmental conditions: Class M1, as per Directive 2014/32/EC of the European Parliament and of the Council of 26 February 2014
- Classification of electromagnetic environmental conditions: class E1 and E2, per EN-ISO 4064:2014 and Directive 2014/32/EC of the European Parliament and of the Council of 26 February 2014

TECHNICAL DATA

Parameter			MWN-08 (IP68); MWN (IP65)											
Nominal diameter	DN	mm	40	50	65	80	100	125	150	200	250	300		
Temperature class (operating temperature range)	T30 (0,1 to 30°C); T50 (0,1 to 50°C)		MWN-08 or MWN; MWN (version)-NKOP											
Permanent flow rate	Q ₃	m ³ /h	25	40	63	100	160	250	400	630	1000	1600		
Overload flow rate	Q ₄	m ³ /h	31,25	50	78,75	125	200	312,5	500	787,5	1250	2000		
Transitional flow rate	Q ₂	m ³ /h	0,4	0,64	0,806	1	1,28	2,5	3,2	8,064	16	20,48; 25,6		
Minimum flow rate	Q ₁	m ³ /h	0,25	0,4	0,504	0,625	0,8	1,563	2	5,04	10	12,8; 16		
Starting flow rate	-	m ³ /h	0,15	0,15	0,2	0,25	0,25	0,5	1,0	1,5	3	8		
Measurement range, R	Q ₃ /Q ₁	-	100	100	125	160	200	160	200	125	100	125 100		
Coefficient	Q ₂ /Q ₁	-	1,6											
Maximum pressure loss	p	kPa	P10	P16	P40	P10	P25	P25	P25	P16	P10	P10		
Temperature class (operating temperature range)	T130 (0,1 to 130°C)		MWN 130 or MWN 130 (version)-NKP											
Permanent flow rate	Q ₃	m ³ /h	25	25	40	63	100	160	250	400	630	1000		
Overload flow rate	Q ₄	m ³ /h	31,25	31,25	50	78,75	125	200	312,5	500	787,5	1250		
Transitional flow rate	Q ₂	m ³ /h	1	1	1,6	2,52	4	6,4	10	16	40,32	64		
Minimum flow rate	Q ₁	m ³ /h	0,625	0,625	1	1,575	2,5	4	6,25	10	25,2	40		
Starting flow	-	m ³ /h	0,25	0,25	0,3	0,35	0,6	1,1	2	4	8	15		
Measurement range, R	Q ₃ /Q ₁	-	40	40	40	40	40	40	40	40	25	25		
Coefficient	Q ₂ /Q ₁	-	1,6											
Maximum pressure loss	p	kPa	P10	P16	P40	P10	P25	P25	P25	P16	P10	P10		
Connection ends: K - flanged*** G - threaded			K	K/G	K	K	K	K	K	K	K	K		
Flow profile sensitivity class	-	-	U0, D0											
Indicating range	-	m ³	10						10					
Resolution of reading	-	m ³	0,0005						0,005		0,05			
Maximum allowable pressure	P _{max}	-	MAP16 = (16bar)											
Operating pressure range	-	bar	0,3 to 16											
Operating orientation	-	-	H, V											
Maximum permissible error range: Q ₂ ≤ Q ≤ Q ₄	ε	%	±2 for 0,1°C T 30°C cold water ±3 T > 30°C water											
Maximum permissible error range: (Q ₁ ≤ Q < Q ₂)	ε	%	±5											
Dimensions	Reed relay pulse transmitter NK (IP65 only)	-	dm ³ /pulse	10 (standard pulsing)	100 (standard pulsing) 10 (available on request)				1000 (standard pulsing)					
									100 (available request)			-		
	Optoelectronic pulse transmitter NO (for IP65 T30 or T50 only)	-	dm ³ /pulse	1						10		105,2632		
		L	mm	200	200	200	225/200*	250	250	300	350	450	500	
		h	mm	65	72	83	95	105	120	135	160	193	230	
		Height (IP 68)	H	mm	179,5	186,5	197,5	218	228	255,5	350	375	422	489
			H1	mm	187,5	194,5	205,5	226	236	263,5	357	382	429	496
			H2	mm	264,5	271,5	282,5	303	313	340,5	434,1	459,1	506,1	573,1
		Height (IP65)	H	mm	168,6	175,6	186,6	207,1	217,1	244,6	338,9	363,9	410,9	477,9
H1			mm	173,6	180,6	191,6	212,1	222,1	249,6	343,6	368,6	415,6	482,6	
H2	mm		236	243	254	274,5	284,5	312	406	431	478	545		
H3**	mm	283	290	301	347,5	358	385	580	604	650	720			
Dz	mm	150	165	185	200	220	250	285	340	400	460			
Weight	W/o transmitter	kg	7,9	9,9	10,6	13,3/13,8*	15,6	18,1	40,1	51,1	75,1	103,1		
	w/NK or NO transmitter		8,3	10,3	11	13,7/14,2*	16	18,5	40,5	51,5	75,5	103,5		

* ISO 4064 standardised body length on request

** Measuring insert removal clear height

*** Connection flange bolt pattern:


- Standard: PN-EN 1092-2 (PN10), DIN 2532, DIN 2501 (PN10). B54504 (PN10)

- Special: PN-EN 1092-2 (PN16) available on request


- Extra: ANSI B16.5 Class 150 (DN40-300) (available on request)

**FEATURES AND
ADVANTAGES**


MWN version -08 (IP68)

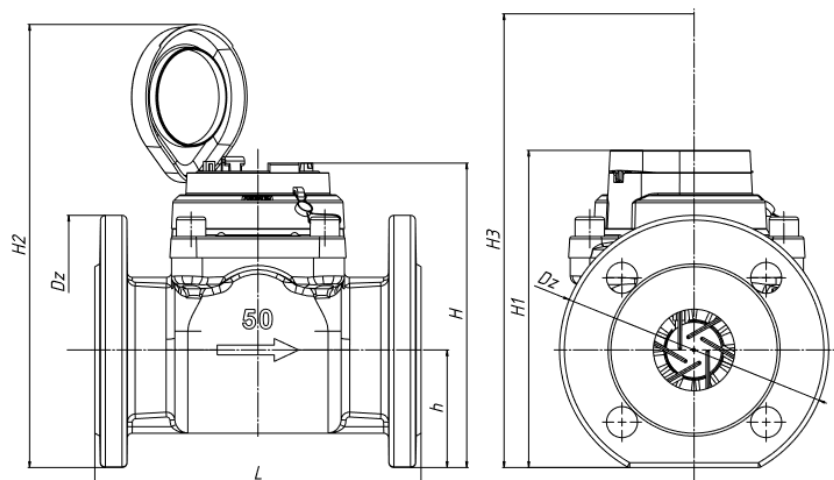


MWN version - (IP65)

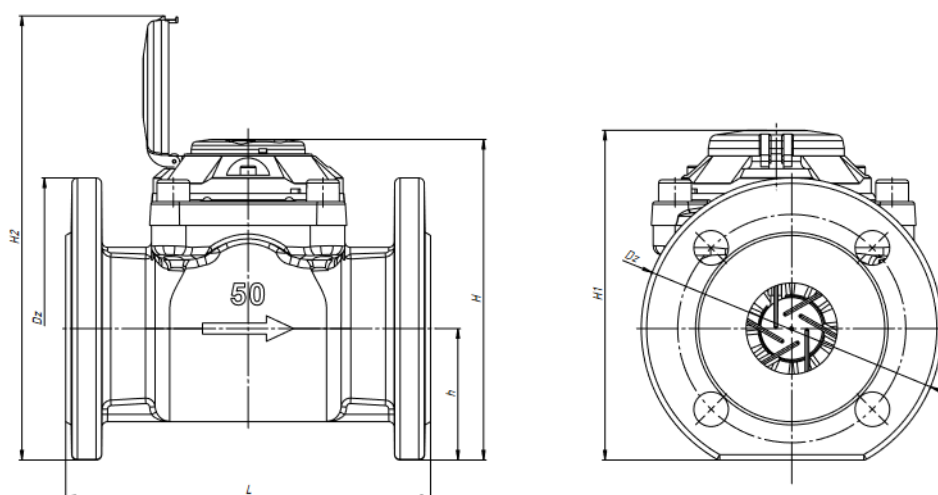

PRESSURE LOSS CHART

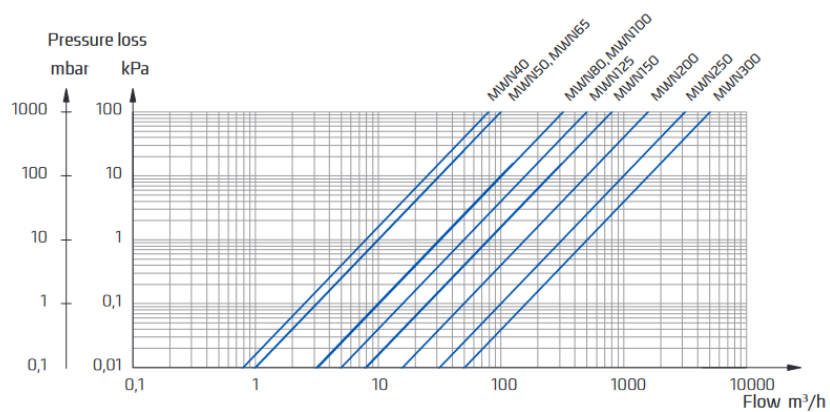

TYPICAL ERROR CHART

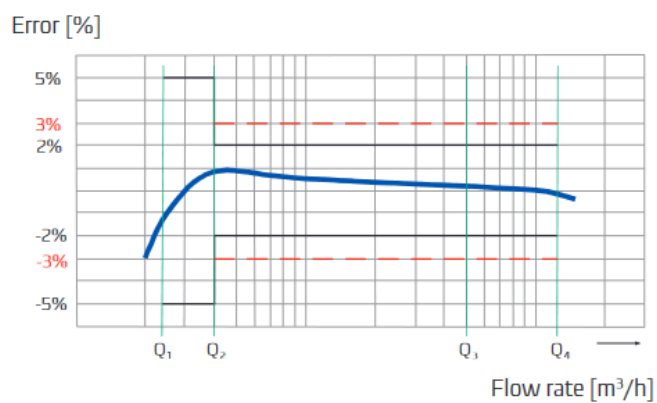

CONTACTS

APATOR POWOGAZ CZECHIA s.r.o.

Havlíčková 919/24

787 01 Šumperk

Czech Republic

Tel.: +420 583 718 261

E-mail: prodej@metra-su.cz

Web: www.apator.cz

Your distributor:

The manufacturer reserves the right to change design, technical specifications and accessories without prior notice.

K2025/10a