

THERMOSTAT TH 473

DESCRIPTION

Thermostat TH 473 is made as one unit. Sensor and the electrical switch system are assembled, adjusted and enclosed in the thermostat body. To install it, use thread M22x1.5 on the thermostat body and hexagon head OK 27. Connecting terminals are flat pins 6.3x0.8 mm that are electrically insulated from the thermostat body. Thermostat head with flat pins is connected permanently with thermostat body. Thermostat is supplied with sealing ring diameter 22x27. There are gilded silver contacts used in switch mechanism thermostat must not be connected to higher voltage or current than described in technical data, otherwise technical parameters can not be guaranteed.



Required temperature is adjusted by manufacturer according the specification in order, set temperature can not be changed by user.

INSTALLATION

Fix the thermometer in specified hole using spanner No. 27 with torque maximally 45 Nm. Screwing and unscrewing must not be done using flat pins on thermostat head. Spare parts are not supplied.

ADVANTAGES

- Any working position
- Resistance against splashing water
- Resistance against vibration up to 5 g
- Minimal contact resistance
- Very low working voltage

TECHNICAL DATA

Thermostat can be supplied either in switch-on design (Z) or switch-off design (R)

Range of rated temperature	from 30°C to 118°C
Settin accuracy of rated temperature	± 3K
Switching difference	4-18K (A), 4-12K (B)
Rated voltage, rated current	100 mV, 0,5 A DC
Contact resistance	max. 8 mΩ
Technical lifetime for rated voltage and current	5000 cycles
Connecting terminals	flat pins according to ČSN EN 612 10

Codename example


TH 473	R	92	B
Type	Switch-off design	Rated temperature 92°C	Switching difference 4-12K

ORDERING

Please specify following items in order:

- Type
- Thermostat design (Z or R)
- Rated temperature [°C]
- Codename
- Quantity

TECHNICAL DRAWINGS

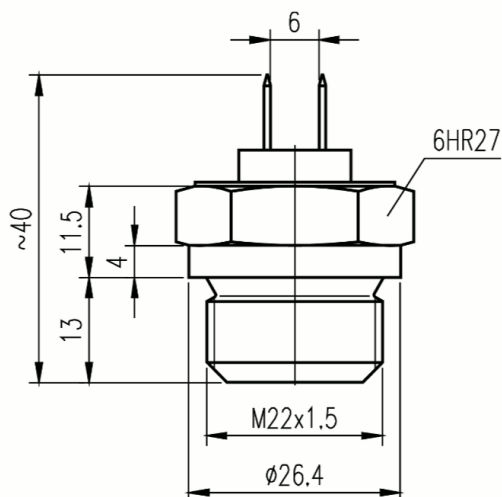

CONTACTS

APATOR POWOGAZ CZECHIA s.r.o.

Havlíčková 919/24

787 01 Šumperk

Czech Republic

Tel.: +420 583 718 261

E-mail: prodej@metra-su.cz

Web: www.apator.cz

Your distributor:

The manufacturer reserves the right to change design, technical specifications and accessories without prior notice.

K2025/10a