


CRS 40 V2


Description

Central reading system CRS 40 V2 is designed for data reading from radio heat cost allocators E-ITN 30 and radio modules for water meters E-RM 30. System is wireless and except for power supply (and possibly connection to Internet) does not require installation of any cables.

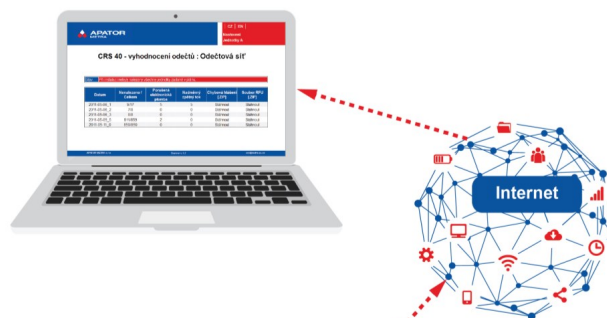

System concept

System requires a minimum of user inputs via user interface. During regular operation it processes and saves data. In case of error, it will let you know - send an e-mail, and you can immediately solve the situation. From time to time you can backup all data to your computer.

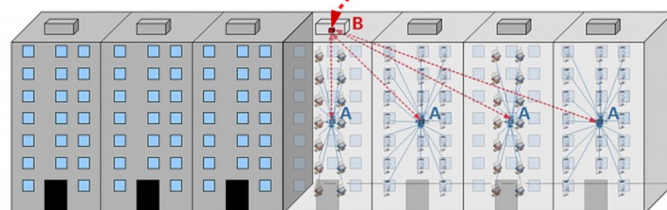

If you are looking for more possibilities you can use secured connection to SFTP server you can run on your own or use server from our company. On this SFTP server you can have available everyday data from all your systems CRS40 and you gain an option to easily and in bulk to configure them. All units can connect everyday to server to upload new data and download configuration files that are used to reconfigure based on your requirements by the end of the day.

System elements

No matter what option of data management for CRS40 you select, granted are fully automatic updates from the manufacturer and developer of operation system Linux so all known security demands are met.

Reading network consists of one controlling Unit B V2 and several collector Units A. These units are automatically configured to wireless network with star topology. Every collector Unit A has direct radio connection with controlling Unit B. Unit B controls communication in whole reading network, it saves and processes collected data.

Technical details

Operating temperature	0 to 40 °C
Operating environment	for indoors installation
Number of read units (E -ITN 30 and E - RM 30)	all in radio range based on reading plan (up to hundreds read units)
Number of Units A in one network	max. 10 units
Number of overlapping reading networks	max. 15 units
Remote access	RJ45 (Ethernet), or over Wi-Fi or GSM
Dimensions	255 x 205 x 68 mm
Power	Unit A - 230 V / 30 mA / 50Hz Unit B V2 - 230 V / 30 mA / 50 Hz
IP Code	IP 40
Supported browsers (for work with GUI)	Mozilla Firefox 7.0 and higher Internet Explorer 8.0 and higher Google Chrome 15.0 and higher

Contact

APATOR METRA s.r.o.

Havlíčková 919/24
787 64 Šumperk
Czech Republic

Tel.: +420 583 718 261
Fax.: +420 583 718 150
E-mail: prodej@metra-su.cz
WWW: <http://www.metra-su.cz>

Your distributor